



Fly Ash Extender

Usages

Synergy with Coal Ash as SCM

Compressive Strengths

Increased Early-Age Stength

Set Times

Replacing 10% of the binder that was fly ash with ReAct decreases the initial set time by 20 minutes, or 10%.

Workability

Same Workability

Cement Replacement

10-20%

ASTM

C595 or C1157

ReAct fly ash extender is a white reactive calcium carbonate that can be used with SCM to design low clinker mixes for early strength and flow.

+ Business Applications

Pumped concrete, mass concrete (low heat), resistance to ASR, geotechnical applications, and sulfate resistance.

+ Key Benefits

Improved Particle Packing

More Homogeneous Cement Paste Microstructure

Water Reduction

Improved Workability & Lower Permeability

Enhanced Degree of Hydration

Increased Early-Age Strength

Reduced Carbon Intensity of Binder


Easy to Blend and Handle


+ Available 2024 Q1

The technical data provided here relates only to the specific material designated herein and does not relate to use of this material in combination with any other material or in any process. Fortera assumes no liability in connection with the use of the information contained herein. Nothing in this sheet should be construed as ensuring compliance with any federal, state or local laws or regulations. This document provides no warranties, express or implied, of merchantability, fitness for a particular purpose or otherwise. Please refer to Fortera's standard conditions of sale.




Fly Ash Extender

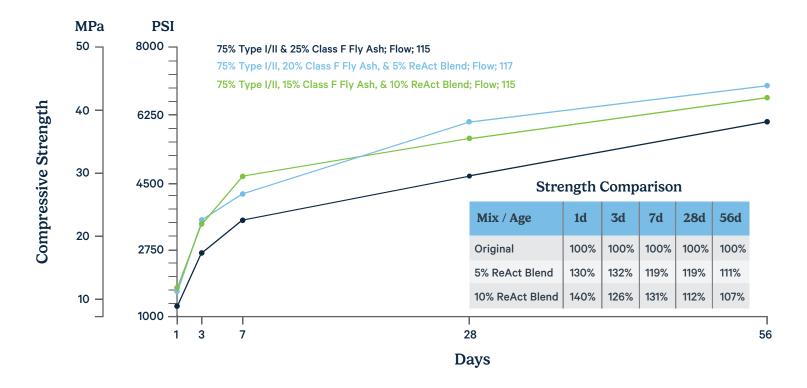

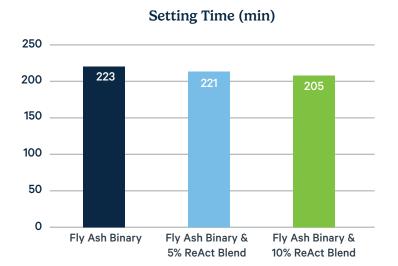

Bulk Resistivity (Ω m) at 28 & 56 Days

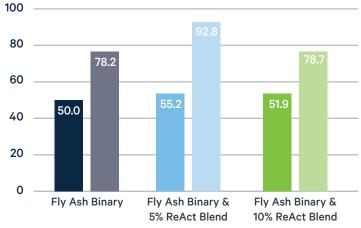

A higher value of bulk resistivity reflects a materials higher durability.